





Signal Microwave FRF40


2.92 mm (40 GHz) Field Replaceable Connectors




FRF40-001




FRF40-002



FRF40-003




FRF40-004



FRF40-005

- 2.92 mm Interface
- 2 and 4 Hole Flanges
- Standard 2 and 4 Hole Flange Sizes
- 40 GHz Bandwidth
- Rear Socket for 12 mil pin
- Low VSWR:
DC – 27.0 GHz.....1.10:1
27.0 – 40.0 GHz....1.15:1
- Temp Range -55° to +105°
- DFARS Compliant

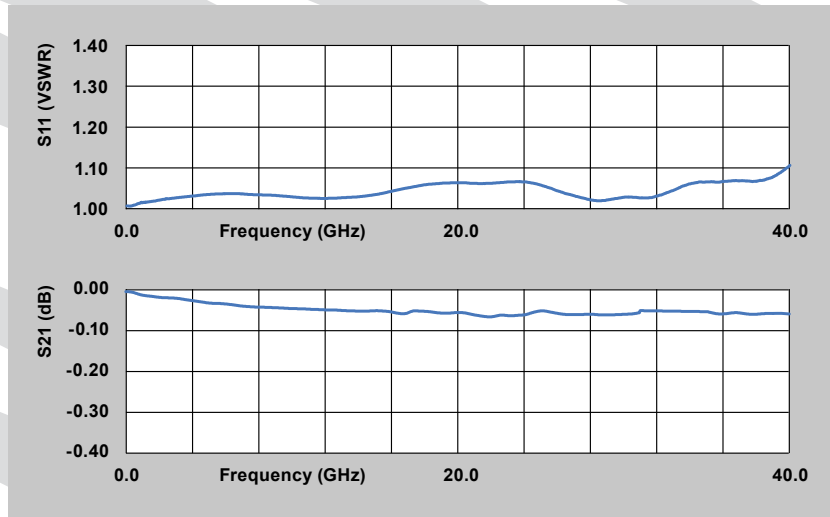

Typical test data through 40 GHz using FRF40-001 back-to-back connector pair with test pin.

Signal Microwave, LLC
 info@signalmicrowave.com
 (480) 322-4992

