





Signal Microwave FRF40


2.92 mm (40 GHz) Field Replaceable Connectors




FRF40-001




FRF40-002



FRF40-003



FRF40-004




FRF40-005


- 2.92 mm Interface
- Standard 2 and 4 Hole Flange Sizes
- 40 GHz Bandwidth
- Rear Socket for 12 mil pin
- Low VSWR:
DC – 27.0 GHz.....1.10:1
27.0 – 40.0 GHz....1.15:1
- Temp Range -55° to +105°
- DFARS Compliant



Connector: FRF40-001
Tested as back-to-back pair

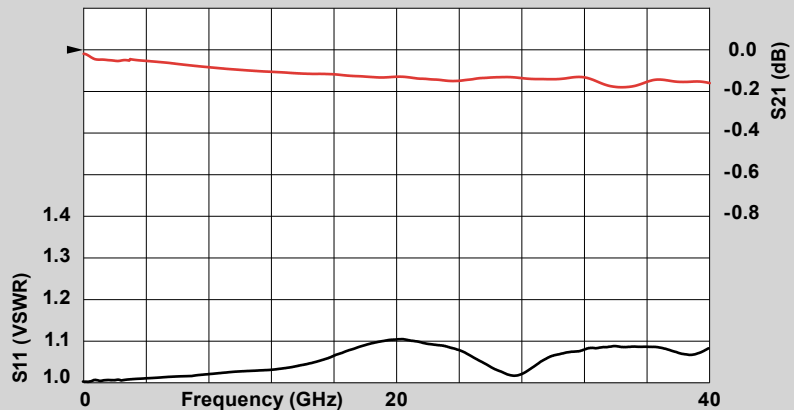

Typical test data through 40 GHz using FRF40-001 back-to-back connector pair with test pin.

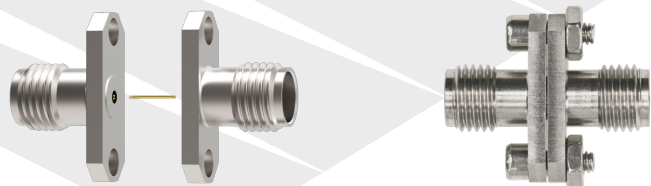

Signal Microwave, LLC
Chandler, Arizona
info@signalmicrowave.com
www.signalmicrowave.com
(480) 322-4992