




TLF40-001

Signal Microwave TLF40


40 GHz Top Launch Connectors

Edge Launch Type Performance Anywhere on the Board

- 2.92 mm Interface
- Top RF launch to 40 GHz
- Compression Contact
- No Soldering Required
- Transitions to a microstrip or grounded coplanar line on the top layer of the board
- Signal does not need to travel through the board vias

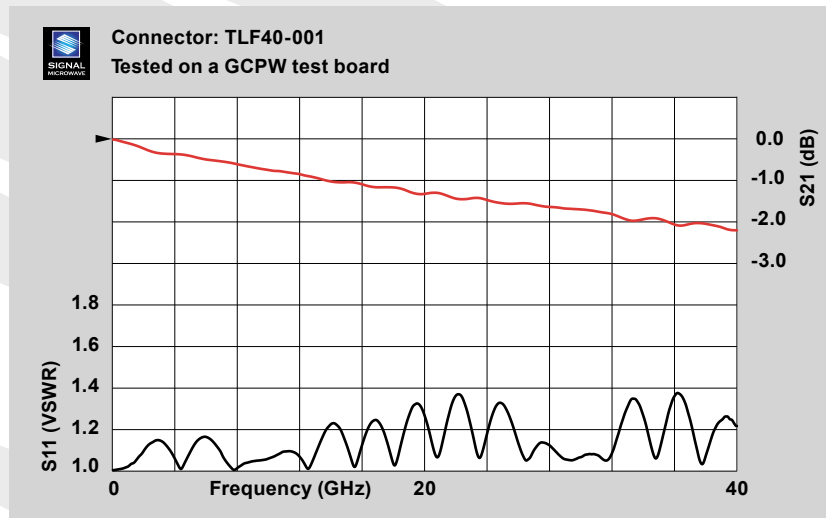

Typical data for 2 connectors tested on a GCPW test board.

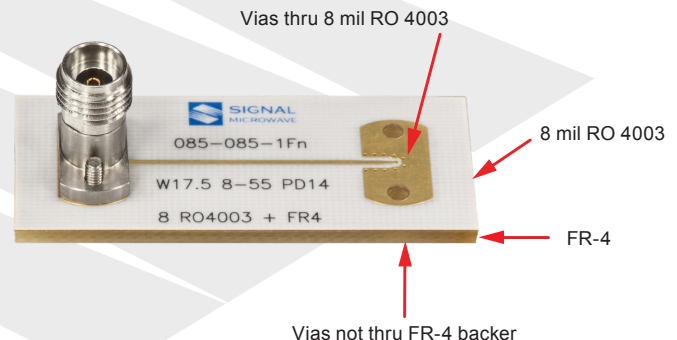

Signal Microwave, LLC
Tempe, Arizona
info@signalmicrowave.com
www.signalmicrowave.com
(480) 322-4992